



# DIGITAL CALIPER WITH INTERCHANGEABLE POINTS CODE 1526-200

DATA  
OUTPUT


## short spherical points (included)




## long spherical/flat points (included)




## spherical blade points (included)




1526-200

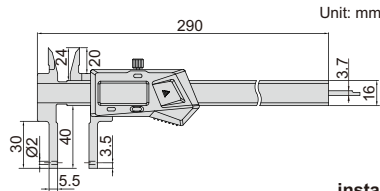


## install points



## preset buttons



## measure internal and external grooves

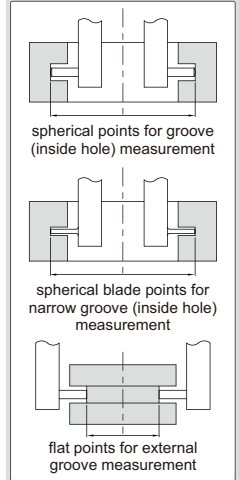


- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: points (code 1526-T101, 7392, 7391, 7381, 7321), depth stop (code 6143), data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)

Point	Range	Accuracy	Application
short spherical points	12-212mm/0.5-8.5"(internal)	±0.03mm	for grooves inside small hole
long spherical/flat points	24-224mm/1-8.8"(internal) 0-187mm/0-7.5"(external)	±0.03mm	spherical points for grooves inside hole flat points for external grooves
spherical blade points	24-224mm/1-8.8"(internal) 0-187mm/0-7.5"(external)	±0.03mm	for narrow grooves inside hole

## zero setting block for external measurement (included)




## Depth stop (optional)

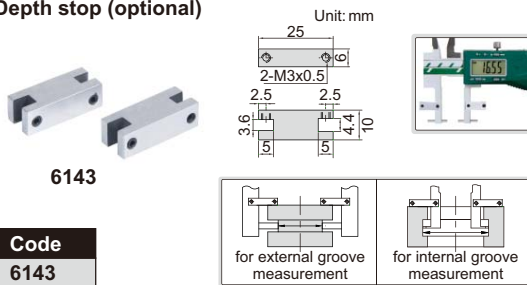


6143

Code  
6143



## Multifunctional points (optional)

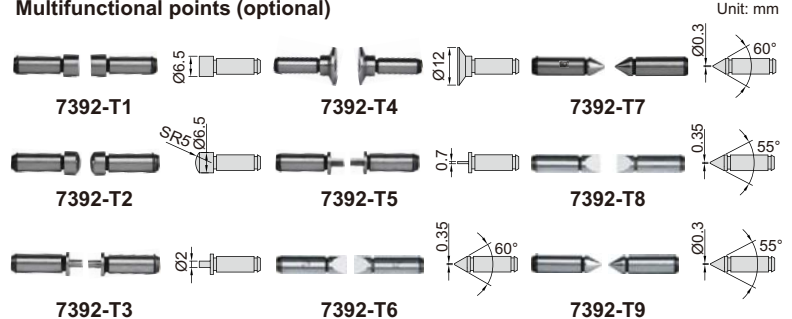


Code	Type
7392-T1*	flat
7392-T2*	spherical
7392-T3*	spline

Code	Type
7392-T4*	disk
7392-T5*	blade
7392-T6*	knife-edge

Code	Type
7392-T7*	point
7392-T8*	knife-edge
7392-T9*	point


\* It is necessary to use point sleeve (code 1526-T101) for these points

## Point sleeve (optional)

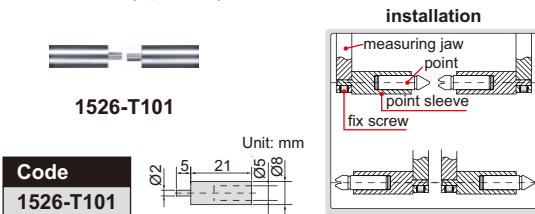

1526-T101

Code  
1526-T101



## Screw thread points (optional)



7321-T16

7381-T11

## Ball points (optional)

Code	Ball dia.(D)	Module
7391-T3*	SØ2.0mm	1.25
7391-T4*	SØ2.5mm	1.5
7391-T5*	SØ3.0mm	1.75
7391-T6*	SØ3.5mm	2
7391-T7*	SØ4.0mm	2.25
7391-T8*	SØ4.5mm	2.5
7391-T9*	SØ5.0mm	2.75
7391-T10*	SØ6.0mm	3.5

7391-T5

Unit: mm

## Internal thread (60° thread angle)

Code	Pitch
7321-T11*	0.4-0.5mm/64-48TPI
7321-T12*	0.6-0.9mm/44-28TPI
7321-T13*	1-1.75mm/24-14TPI
7321-T14*	2-3mm/13-9TPI
7321-T15*	3.5-5mm/8-5TPI
7321-T16*	5.5-7mm/4.5-3.5TPI
7321-T1S*	6 pairs/set, including all above points

## External thread (60° thread angle)

Code	Pitch
7381-T11*	0.4-0.5mm/64-48TPI
7381-T12*	0.6-0.9mm/44-28TPI
7381-T13*	1-1.75mm/24-14TPI
7381-T14*	2-3mm/13-9TPI
7381-T15*	3.5-5mm/8-5TPI
7381-T16*	5.5-7mm/4.5-3.5TPI
7381-TS*	6 pairs/set, including all above points

\* It is necessary to use point sleeve (code 1526-T101) for these points