

**IP54**  
WATERPROOF


**DATA**  
OUTPUT

# DIGITAL OUTSIDE MICROMETER WITH INTERCHANGEABLE ANVILS



- Resolution 0.001mm/0.0001"  
(resolution of **3506-100A** and **3506-150A** is 0.001mm/0.00005")
- IP54 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards
- Optional accessory: data output cable (code **7306-30**, **7302-SPC2A**, **7305-SPC3**)



**3506-100A**

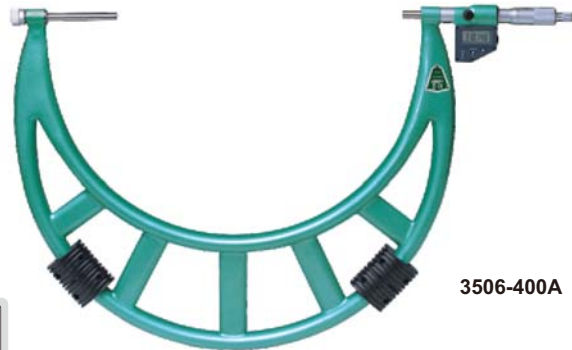

**3506-400A**



Code	Range	Type	Accuracy	L	b	Setting standard (included)
<b>3506-100A</b>	0-100mm/0-4"	A	±5μm	105	57	25, 50, 75
<b>3506-150A</b>	0-150mm/0-6"	A	±6μm	155	82	25, 50, 75, 100, 125
<b>3506-300A</b>	150-300mm/6-12"	A	±8μm	305	165	150, 175, 200, 225, 250, 275
<b>3506-301A</b>	200-300mm/8-12"	A	±8μm	305	165	200, 225, 250, 275
<b>3506-400A</b>	300-400mm/12-16"	B	±9μm	405	224	325, 375
<b>3506-500A</b>	400-500mm/16-20"	B	±11μm	505	275	425, 475
<b>3506-600A</b>	500-600mm/20-24"	B	±12μm	605	321	525, 575
<b>3506-700A</b>	600-700mm/24-28"	B	±13μm	705	371	625, 675
<b>3506-800A</b>	700-800mm/28-32"	B	±15μm	805	426	725, 775
<b>3506-900A</b>	800-900mm/32-36"	B	±16μm	905	476	825, 875
<b>3506-1000A</b>	900-1000mm/36-40"	B	±17μm	1005	576	925, 975

