

SPLIT TYPE DIAL BORE GAGE FOR BLIND HOLES





dial indicator
is not included



- Split type contact points
- Accuracy (without indicator):
3µm (measuring range 1.5~10mm),
4µm (measuring range 10~20.6mm)
- Repeatability (without indicator): 1µm

(mm)

Code	Contact point			Code	Setting ring	
	Measuring range	Measuring depth (L1)	Total length (L)		Code	Diameter
2427-1D75	1.5 - 1.9	17	93	2426-N2D25	6312-1D75	1.75
2427-2	1.8 - 2.2	17	93		6312-2	2
2427-2D25	2.05 - 2.45	17	93		6312-2D25	2.25
2427-2D5	2.3 - 2.7	25	101	2426-N4	6312-2D5	2.5
2427-2D75	2.55 - 2.95	25	101		6312-2D75	2.75
2427-3	2.8 - 3.2	25	101		6312-3	3
2427-3D25	3.05 - 3.45	25	101		6312-3D25	3.25
2427-3D5	3.3 - 3.7	25	101		6312-3D5	3.5
2427-3D75	3.55 - 3.95	25	101		6312-3D75	3.75
2427-4	3.8 - 4.2	25	101		6312-4	4
2427-4D5	4.15 - 4.8	41	118	2427-N9	6312-4D5	4.5
2427-5	4.7 - 5.3	41	118		6312-5	5
2427-5D5	5.2 - 5.8	41	118		6312-5D5	5.5
2427-6	5.7 - 6.3	41	118		6312-6	6
2427-6D5	6.2 - 6.8	41	118		6312-6D5	6.5
2427-7	6.7 - 7.3	41	118		6312-7	7
2427-7D5	7.2 - 7.8	45	118		6312-7D5	7.5
2427-8	7.7 - 8.3	45	118		6312-8	8
2427-8D5	8.2 - 8.8	45	118		6312-8D5	8.5
2427-9	8.7 - 9.3	45	118		6312-9	9
2427-10	9.2 - 10.5	45	118	2427-N20	6312-10	10
2427-11	10.2 - 11.5	45	118		6312-11	11
2427-12	11.2 - 12.5	45	118		6312-12	12
2427-13	12.2 - 13.5	45	118		6312-13	13
2427-14	13.4 - 14.6	45	118		6312-14	14
2427-15	14.4 - 15.6	45	118		6312-15	15
2427-16	15.4 - 16.6	45	118		6312-16	16
2427-17	16.4 - 17.6	45	118		6312-17	17
2427-18	17.4 - 18.6	45	118		6312-18	18
2427-19	18.4 - 19.6	45	118		6312-19	19
2427-20	19.4 - 20.6	45	118	6312-20	20	

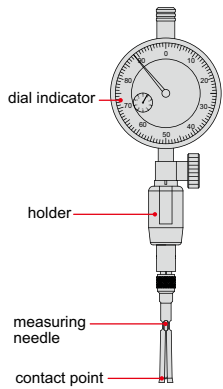

2426-HOLDER1



retraction
button

2426-HOLDER2

HOLDER

Code	Retraction	Applicable points
2426-HOLDER1	without	all
2426-HOLDER2	with	all