



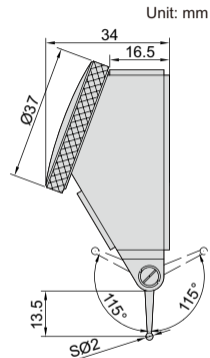

JEWELLED BEARING

- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: diameter  $\varnothing 4\text{mm}$  and  $\varnothing 8\text{mm}$
- Optional accessory: styli (page 106)



## DIAL TEST INDICATOR



2399-08

Code	Range	Graduation	Accuracy	Hysteresis	Dial Reading
2399-08*	0.8mm	0.01mm	13 $\mu\text{m}$	3 $\mu\text{m}$	0-40-0

\* Supplied with manufacturer inspection certificate traceable to NIST USA