

DIAL SNAP GAGE

- For quick Go/No-Go judgment of diameter of cylinders and shafts
- Left anvil retracting stroke: 2mm
- Measuring force: 6-8N
- Flatness of anvil: 1.5 μ m
- Repeatability: 1 μ m
- Carbide measuring faces for anvils
- Front edges of anvils are chamfered for easy workpiece insertion
- Optional accessory: dial indicators and digital indicators (reading 0.001mm or 0.01mm)




dial indicator is not included

2186-25

Code	Range	Parallelism of measuring faces	A	B	C
2186-25	0-25mm	4 μ m	42	11-18	20
2186-50	25-50mm	4 μ m	69	11-32	41
2186-75	50-75mm	5 μ m	94	17-41	51
2186-100	75-100mm	6 μ m	119	31-55	65
2186-125	100-125mm	6 μ m	144	42-70	75
2186-150	125-150mm	8 μ m	169	55-82	90
2186-175	150-175mm	8 μ m	194	68-95	100
2186-200	175-200mm	10 μ m	219	85-110	115
2186-225	200-225mm	10 μ m	244	95-120	130
2186-250	225-250mm	10 μ m	269	110-135	145
2186-275	250-275mm	12 μ m	294	120-150	160
2186-300	275-300mm	12 μ m	319	170	

(mm)

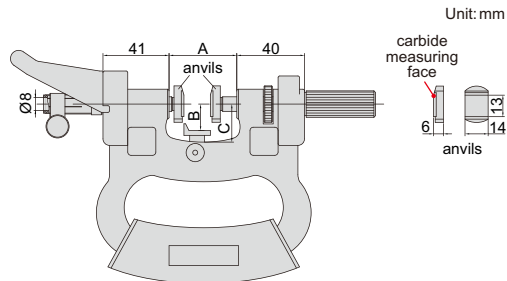

Unit: mm