


software (included)

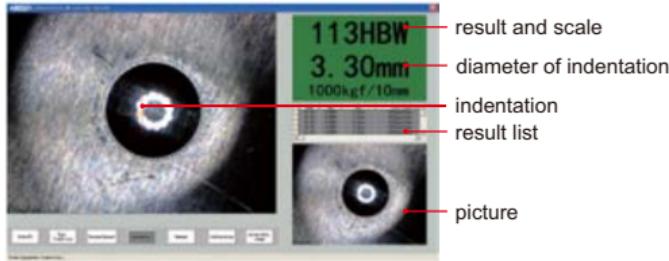

BRINELL INDENTATION MEASURING SYSTEM


- Connected to computer USB port
- Automatically measure the indentation
- Result saved to Excel automatically
- Low and high limits with judgement
- Calibration with indentation on standard hardness block

SPECIFICATION

| Code | ISHB-TSA | ISHB-TSB |
|-------------------------------|------------------------------------|-------------------------------|
| Applicable Brinell indenter | Ø10mm | Ø2.5mm, Ø5mm |
| Hardness range | 8~650HB | |
| Range of indentation diameter | Ø2.4~6mm | Ø0.6~3mm |
| Test force | 100, 250, 500, 1000, 1500, 3000kgf | 62.5, 125, 187.5, 250, 750kgf |
| Hardness resolution | 1HB | |
| Length resolution | 0.01mm | |
| Length accuracy | ±1%(diameter of indentation) | |
| Camera | Sensor | 1/3.2" CMOS |
| | Pixel | 2M (resolution 1024x768) |
| | View field | 9×6.8mm 4.5×3.4mm |
| Dimension | 170×54×54mm | |
| Weight | 420g | |



application

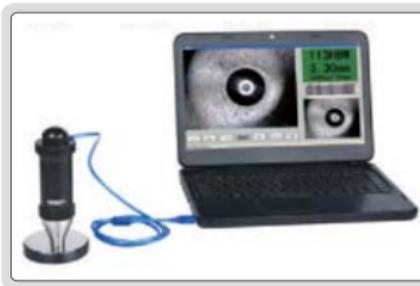

STANDARD DELIVERY

| | |
|---------------------|-------------|
| Main unit | 1pc |
| Software and dongle | 1pc of each |