



# SPLIT TYPE DIAL BORE GAGE



dial indicator  
is not included



- Split type contact points
- Accuracy (without indicator):  
3µm (measuring range 0.95~10mm),  
4µm (measuring range 10~20.6mm)
- Repeatability (without indicator): 1µm

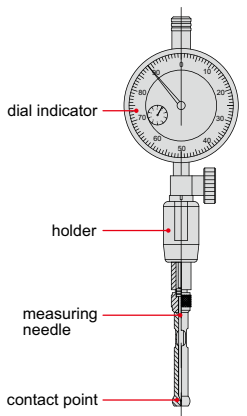

(mm)

| Code      | Contact point   |                      |                  |              | Measuring needle | Setting ring |          |    |
|-----------|-----------------|----------------------|------------------|--------------|------------------|--------------|----------|----|
|           | Measuring range | Measuring depth (L1) | Total length (L) | Material     |                  | Code         | Diameter |    |
| 2426-1    | 0.95 - 1.15     | 13                   | 89               | carbide tip  | 2426-N1D4        | 6312-R1      | 1        |    |
| 2426-1D1  | 1.07 - 1.25     | 13                   | 89               | carbide tip  |                  | 6312-R1D1    | 1.1      |    |
| 2426-1D2  | 1.17 - 1.35     | 13                   | 89               | carbide tip  |                  | 6312-R1D2    | 1.2      |    |
| 2426-1D3  | 1.27 - 1.45     | 13                   | 89               | carbide tip  |                  | 6312-R1D3    | 1.3      |    |
| 2426-1D4  | 1.37 - 1.55     | 13                   | 89               | carbide tip  |                  | 6312-R1D4    | 1.4      |    |
| 2426-1D75 | 1.5 - 1.9       | 17                   | 93               | carbide tip  | 2426-N2D25       | 6312-1D75    | 1.75     |    |
| 2426-2    | 1.8 - 2.2       | 17                   | 93               | carbide tip  |                  | 6312-2       | 2        |    |
| 2426-2D25 | 2.05 - 2.45     | 17                   | 93               | carbide tip  | 2426-N4          | 6312-2D25    | 2.25     |    |
| 2426-2D5  | 2.3 - 2.7       | 25                   | 101              | carbide tip  |                  | 6312-2D5     | 2.5      |    |
| 2426-2D75 | 2.55 - 2.95     | 25                   | 101              | carbide tip  |                  | 6312-2D75    | 2.75     |    |
| 2426-3    | 2.8 - 3.2       | 25                   | 101              | carbide tip  |                  | 6312-3       | 3        |    |
| 2426-3D25 | 3.05 - 3.45     | 25                   | 101              | carbide tip  |                  | 6312-3D25    | 3.25     |    |
| 2426-3D5  | 3.3 - 3.7       | 25                   | 101              | carbide tip  |                  | 6312-3D5     | 3.5      |    |
| 2426-3D75 | 3.55 - 3.95     | 25                   | 101              | carbide tip  |                  | 6312-3D75    | 3.75     |    |
| 2426-4    | 3.8 - 4.2       | 25                   | 101              | carbide tip  |                  | 6312-4       | 4        |    |
| 2426-4D5  | 4.15 - 4.8      | 41                   | 118              | hard chromed |                  | 6312-4D5     | 4.5      |    |
| 2426-5    | 4.7 - 5.3       | 41                   | 118              | hard chromed |                  | 6312-5       | 5        |    |
| 2426-5D5  | 5.2 - 5.8       | 41                   | 118              | hard chromed | 6312-5D5         | 5.5          |          |    |
| 2426-6    | 5.7 - 6.3       | 41                   | 118              | hard chromed | 2426-N9          | 6312-6       | 6        |    |
| 2426-6D5  | 6.2 - 6.8       | 41                   | 118              | hard chromed |                  | 6312-6D5     | 6.5      |    |
| 2426-7    | 6.7 - 7.3       | 41                   | 118              | hard chromed |                  | 6312-7       | 7        |    |
| 2426-7D5  | 7.2 - 7.8       | 45                   | 118              | hard chromed |                  | 6312-7D5     | 7.5      |    |
| 2426-8    | 7.7 - 8.3       | 45                   | 118              | hard chromed |                  | 6312-8       | 8        |    |
| 2426-8D5  | 8.2 - 8.8       | 45                   | 118              | hard chromed |                  | 6312-8D5     | 8.5      |    |
| 2426-9    | 8.7 - 9.3       | 45                   | 118              | hard chromed |                  | 6312-9       | 9        |    |
| 2426-10   | 9.2 - 10.5      | 45                   | 118              | hard chromed |                  | 2426-N20     | 6312-10  | 10 |
| 2426-11   | 10.2 - 11.5     | 45                   | 118              | hard chromed |                  |              | 6312-11  | 11 |
| 2426-12   | 11.2 - 12.5     | 45                   | 118              | hard chromed |                  |              | 6312-12  | 12 |
| 2426-13   | 12.2 - 13.5     | 45                   | 118              | hard chromed | 6312-13          |              | 13       |    |
| 2426-14   | 13.4 - 14.6     | 45                   | 118              | hard chromed | 6312-14          |              | 14       |    |
| 2426-15   | 14.4 - 15.6     | 45                   | 118              | hard chromed | 6312-15          |              | 15       |    |
| 2426-16   | 15.4 - 16.6     | 45                   | 118              | hard chromed | 6312-16          |              | 16       |    |
| 2426-17   | 16.4 - 17.6     | 45                   | 118              | hard chromed | 6312-17          |              | 17       |    |
| 2426-18   | 17.4 - 18.6     | 45                   | 118              | hard chromed | 6312-18          |              | 18       |    |
| 2426-19   | 18.4 - 19.6     | 45                   | 118              | hard chromed | 6312-19          |              | 19       |    |
| 2426-20   | 19.4 - 20.6     | 45                   | 118              | hard chromed | 6312-20          | 20           |          |    |



## HOLDER

| Code         | Retraction | Applicable points |
|--------------|------------|-------------------|
| 2426-HOLDER1 | without    | all               |
| 2426-HOLDER2 | with       | all               |